




Sample parking LOT
No dependence between cars
 The lifting platform rotates and saves the need of maneuvering

1. Lifting capacity 2000 kg
2. Device weight 1650 kg
3. The device is operated by an electric 3 phase motor 400 v 50 Hz, 3 HP
4. Operates smoothly.
5. Lifting time is less than 1 minute.
6. Suitable for open spaces, indoors, underground.

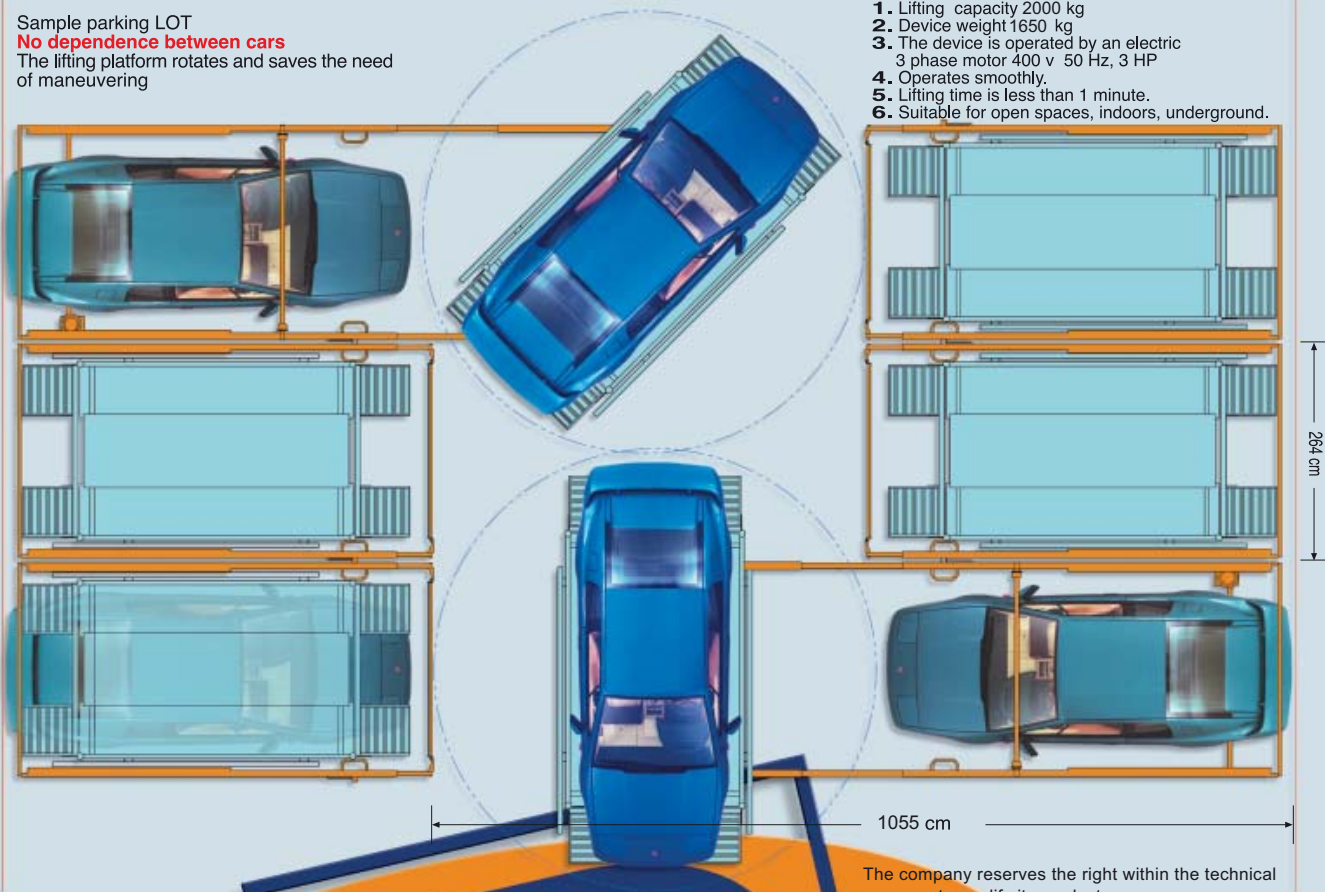

The company reserves the right within the technical progress to modify its products. Drawings, description and data included in this leaflet are therefore not binding but only indicative.

